

▼ Gauge shown: T-6003L



## T Series

Pressure Range:  
**0 - 3500 bar**

Face Diameter:  
**162 - 192 mm**

Accuracy, % of full scale:  
**± 0,5 - 1,5%**



### Cone Mount Gauge Adaptor

Contains fittings to connect 1/4" cone fittings gauge to 3/8" cone system. Kit includes 43-301 tee, 43-704 gauge adaptor and 45-116 tubing. Order model number: **83-011**.



Page: **73**



### Cone Mount Gauge Connector

For connecting gauges with 0.25" cone fitting directly to model number **11-100** or **11-400** pump (page 72). May be used with other 0.25" cone systems. Order model number: **43-704**

- Dual scale reading calibrated in bar and psi
- All gauges have spring-loaded backs with rubber blow-out plugs to protect case assembly in case of over-pressurization
- Integral maximum indicator pointer standard included
- 2800 and 3500 bar models include flange mounting
- 1/2" NPTF versions are made of high strength alloy steel
- 0.25" cone models are made of 316 stainless steel, with 403 stainless steel on 2800 and 3500 bar models.

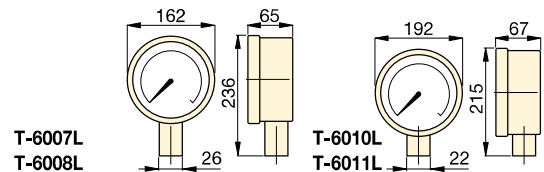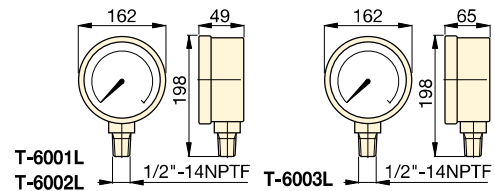

▼ An Enerpac P-2282 hand pump equipped with a T-6011L test system gauge is used for proof pressure testing of hydraulic valves.



Pressure Range (bar)	Pressure Range (psi)	Model Number		Number Intervals (bar)	Graduation Intervals (bar)	Number Intervals (psi)	Graduation Intervals (psi)
		Alloy Steel 1/2" NPTF	Stainless Steel 0,25 cone				
0-70 <sup>1)</sup>	0-1000	<b>T-6001L</b>	-	10	1	100	10
0-350 <sup>1)</sup>	0-5000	<b>T-6002L</b>	-	50	5	500	50
0-700 <sup>1)</sup>	0-10.000	<b>T-6003L</b>	<b>T-6007L</b>	100	10	1.000	100
0-1400 <sup>1)</sup>	0-20.000	-	<b>T-6008L</b>	200	20	1.000	100
0-2800 <sup>2)</sup>	0-40.000	-	<b>T-6010L</b>	500	20	5.000	200
0-3500 <sup>2)</sup>	0-50.000	-	<b>T-6011L</b>	500	50	5.000	200

<sup>1)</sup> Accuracy ± 0,5%

<sup>2)</sup> Accuracy ± 1,5%