CP2041

15,000 RPM

CP2042

5,600 RPM



- Pistol impact screwdriver
- 1/4" hexagonal Quick change
- Double rocking dog clutch
- Reversible one-hand
- Suspension bail

BENEFITS

- High Torque and High Speed
- Comfortable handling with Ergo-grip
- Operator comfort with One-handed reverse
- Perfect for a variety of quick fastening operations



- Pistol impact screwdriver
- 1/4" hexagonal Quick change
- Double rocking dog clutch
- Reversible one-hand
- Suspension bail

BENEFITS

- High power delivered with controlled speed
- Comfortable handling with Ergo-grip
- Operator comfort with One-handed reverse
- Perfect for a variety of fastening operations

CP2036

10,000 RPM



CP2037

Similar features as CP2037 with higher torque


Low Noise & Lightweight

FEATURES

- Straight impact screwdriver
- 1/4" Hexagonal quick change
- Double rocking dog Clutch
- Reversible & lever start
- Built-in power regulator
- Ergonomic with suspension bail

BENEFITS

- Low noise & lightweight
- Quick torque adjustment
- Excellent for soft type materials

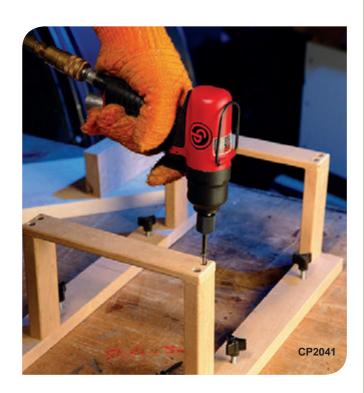



See accessories on pages 44-45

MODEL	PART NUMBER	DRIVE	FREE SPEED	TORQUE RANGE				NET WEIGHT		LENGTH		AIR CONS @LOAD				SOUND PRESS.		AIR INLET
				Min		Max		WEIGHT				@LOAD		ISO 28927 (m/s²)		PRESS.	POWER	INLEI
		in.	rpm	ft.lb	Nm	ft.lb	Nm	lb	kg	in.	mm	cfm	l/s	а	K	ISO 1574	4 - dB(A)	in.
CP2036	615 192 2036	1/4" Hex.	10,000	2.5	3.4	11.8	16	1.7	8.0	8.2	207	13.0	6.1	<2,5		83	94	1/4
CP2037	615 192 2037	1/4" Hex.	10,000	13.3	18	20.7	28	1.8	8.0	8.2	207	13.0	6.1	<2,5		88	99	1/4
CP2041	615 192 2041	1/4" Hex.	15,000	5.9	8	31.0	42	2.3	1.0	5.9	151	27.0	12.7	3.1	1.3	88	99	1/4
CP2042	615 192 2042	1/4" Hex.	5,600	4.4	6	30.2	41	2.3	1.0	5.9	151	27.0	12.7	6.6	3.3	88	99	1/4

All models: Hose int. 3/8" (9.5mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check documents in each tool or on www.cp.com

